


AQUAZONE

QUALITY PLUMBING SOLUTIONS

Installation Guide

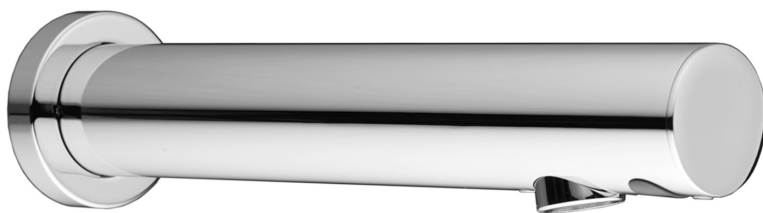


AQE-ECO-I315-XX
AQUAECO WALL MOUNTED TOUCHLESS BASIN TAP


TECHNICAL SPECIFICATION

Item No.	AQE-ECO-I315-CP
Description	Automatic Faucet
Power	DC: 6V (4AA alkaline battery)
Power Consumption	DC:Standby:≤0.2mW
Sensing Distance	5-30CM
Water Pressure	0.5Bar-8Bar
Temperature	0.1 -45°C
Dia. of inlet pipe	G1/2"

INSTALLATION

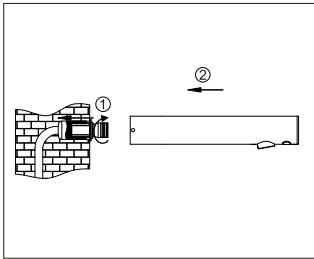


1

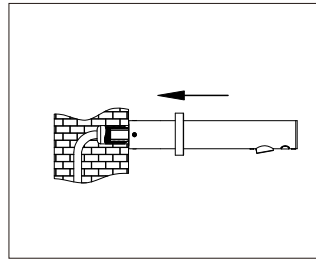


2

1. Fit faucet body into the pre-embedded base in the wall and adjust to the right position.
2. Tighten the screw on the bottom of the faucet body.

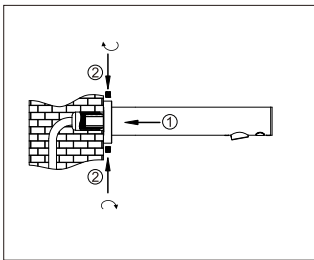


3




4

3. Fix the decorative cover to the wall.
4. Finish installation.

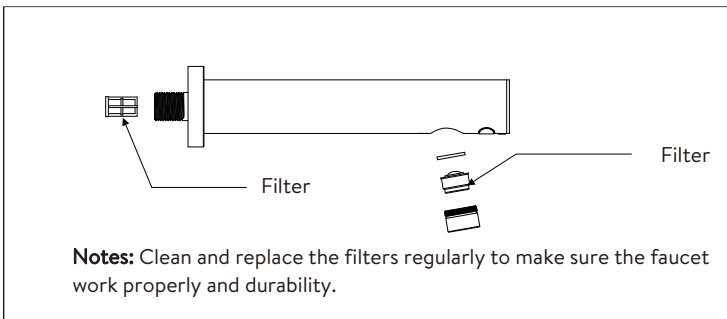


Notes: Clean and replace the filters regularly to make sure the faucet work properly and durability.

BATTERY REPLACEMENT

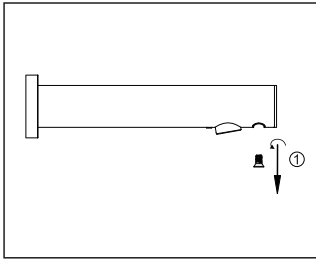


1

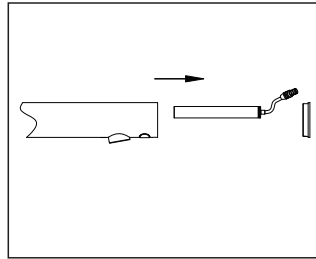


2

1-2 Unscrew the front cover of the faucet and take out the battery box.




3




4

3-4 Open the lid of the battery box and install 4×AAA alkaline batteries.

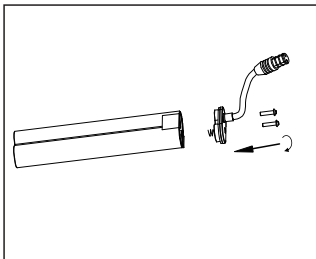

5

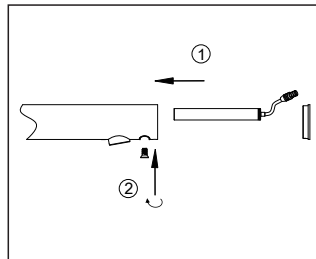


6


5-6 Close the battery box back on, and connect the cables, screw the cover back.

NOTICE

No collision

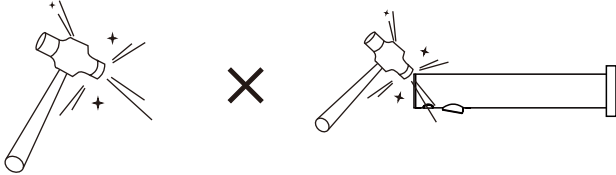

No strong light to the sensor directly



Do not rinse with water directly



Do not use strong corrosive cleaners



■ Clean of the mixer

Our products are finished to the highest standard and due care needs to be taken to ensure their looks are retained.

We recommend cleaning all products with a soft damp cloth **ONLY** and advise strongly against the use of **ALL** cleaning products i.e. powers and liquids.

FEATURE & FUNCTION

Thank you for choosing our electronic automatic faucet.

- WATER SAVING

When your hands enter the sensing range ,the indicator light in the sensor window will shine ,then water flows out and stops immediately once you draw them back.

- HYGIENIC

Automatic on/off to free hands from any touching ,avoiding bacteria infection ,which is more convenient and hygienic.

- INTELLIGENT

Adopts the micro-computer controlling,the faucet can self-adjust the best detection zone and has the function of anti-light and anti-ultraviolet rays .

AUTOMATIC PROTECTION

- Automatically stops after 60 seconds to avoid water wasting.

If more water required,draw back your hands for 4 seconds , the water will flow out again.

AQUAZONE

QUALITY PLUMBING SOLUTIONS

Oakwell Way, Birstall
Leeds, England WF9 17LU

A member of  SANIPEXGROUP