


# BAGNODESIGN

EXPERTLY CRAFTED BATHROOMS

---

## Installation Guide

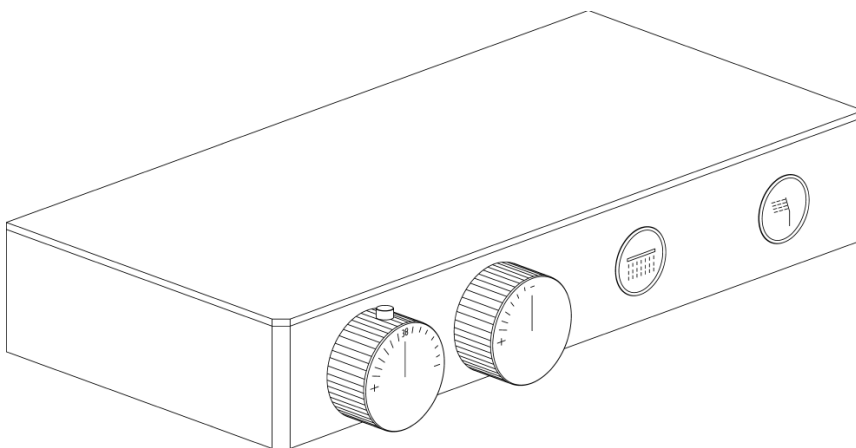

### **BDM-SFM-T503-XX**


STEREO FM SHOWER COLUMN WITH THERMOSTATIC MIXER

A member of **SANIPEXGROUP**  
[www.sanipexgroup.com](http://www.sanipexgroup.com)

## IMPORTANT PLEASE READ

### Maintenance Advice





- a) If the water flow is too small, check if there are any dirt in the aerator or flexible hose. If yes, disassemble those parts and clean with water.
- b) Use soft cloth or water to remove the dirt on the surface. Do not cleanse the chrome plated surface with scratching objects or acid detergent, otherwise, the surface will be scratched and corroded.
- c) Wipe up the surface to its original finish with dry cotton cloth every time after cleansing or using it.
















### Not covered by the guarantee is:

- Breakdown due to -
  - a) Use other than domestic
  - b) Willful act of neglect
  - c) Any malfunction resulting from incorrect use
  - d) incorrect assembly/installation
- Repair costs for damage caused by foreign objects or substances.
- total loss of the product due to non-availability of parts.
- Compensation for loss of use of the product or consequential loss of any kind.
- Call out charges where no fault has been found with the product.
- the cost of repair or replacement of any accessories installed at the same time.
- The cost of routine maintenance, adjustment, overhaul, modification, loss or damage, arising therefrom, including the cost of repairing damage, breakdown, malfunction caused by incorrect use, assembly or maintenance.


# Product Installation Guide

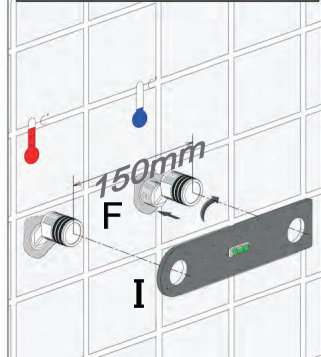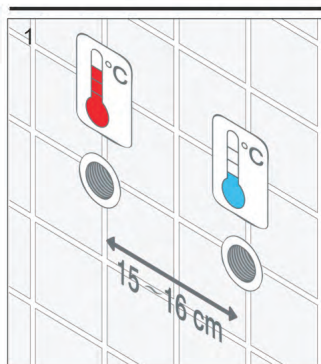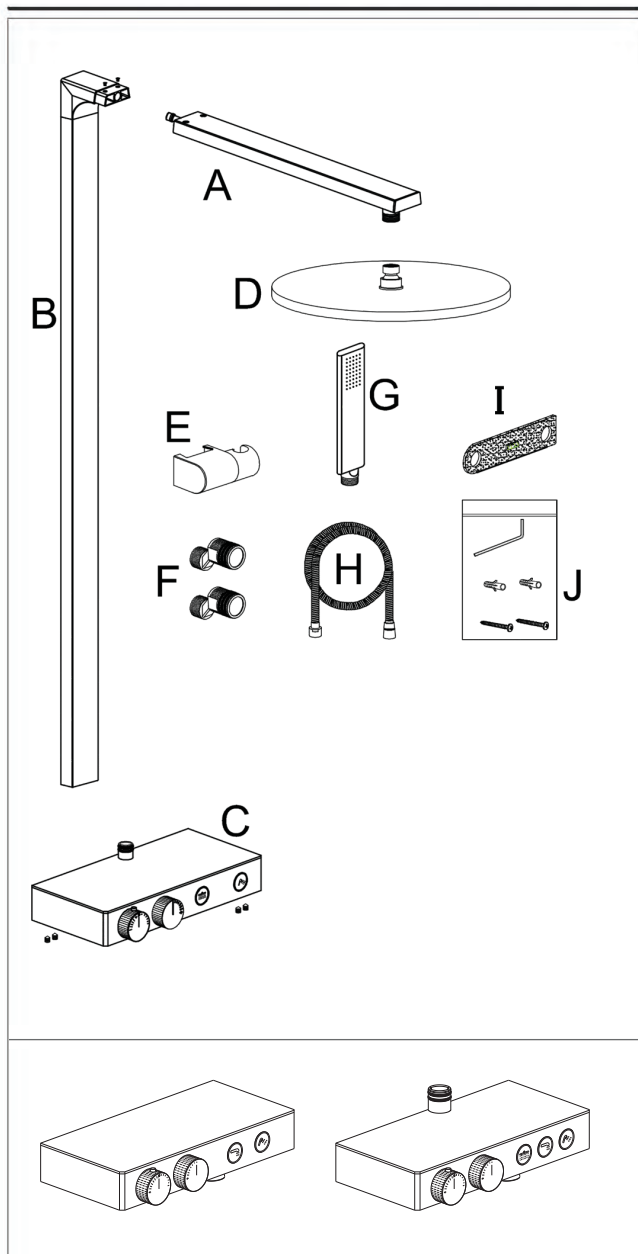

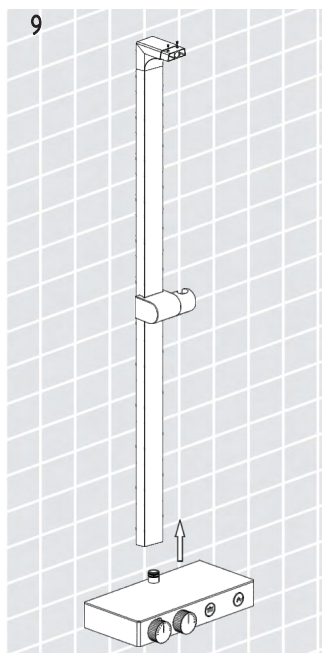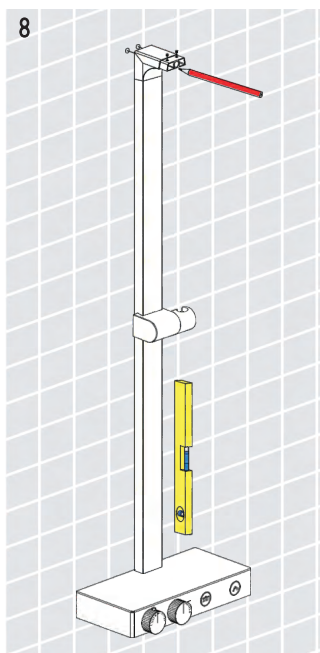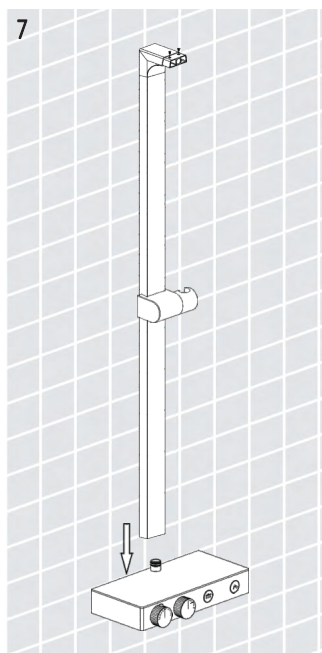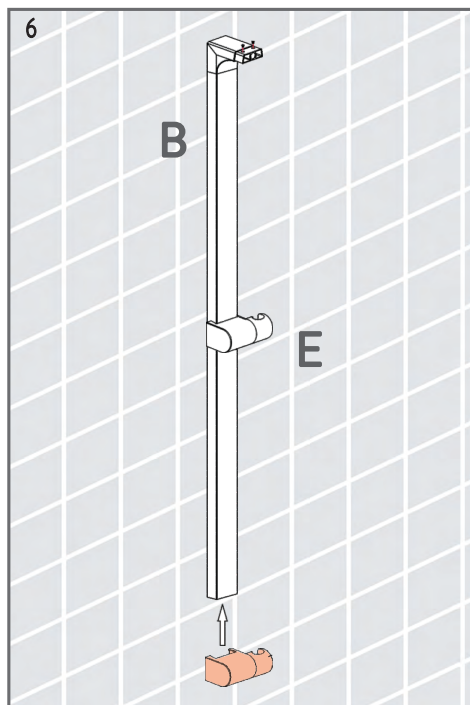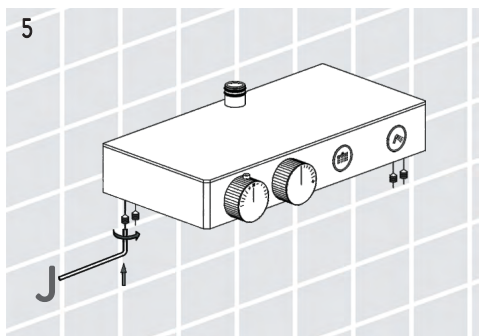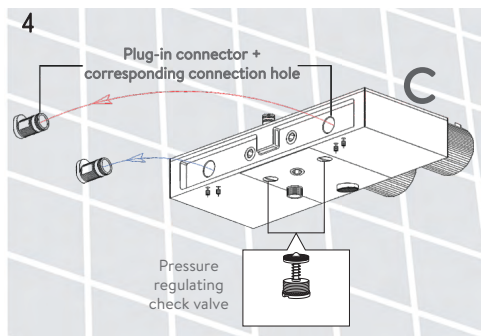

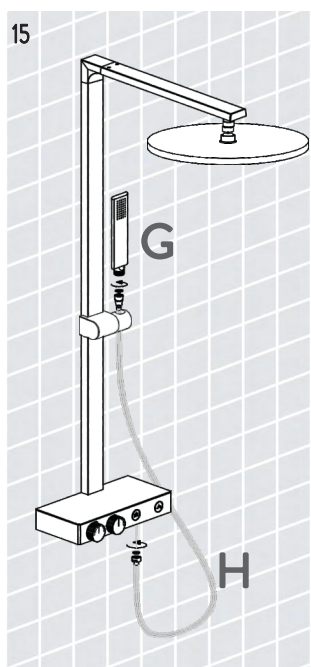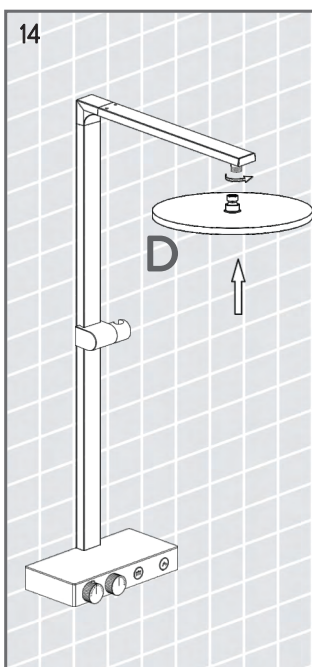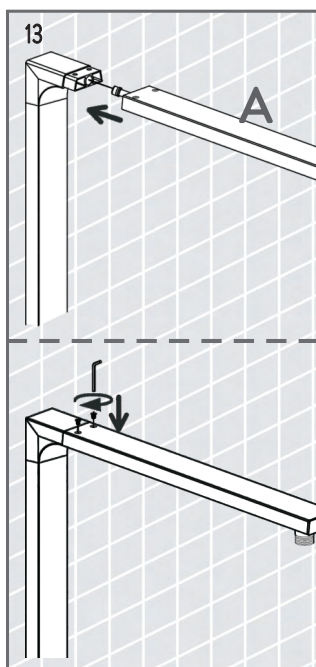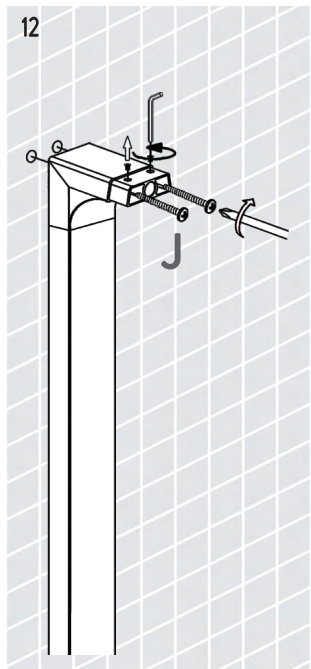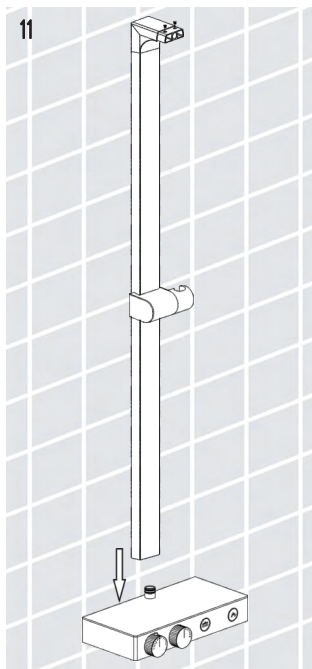

The back of the faucet.

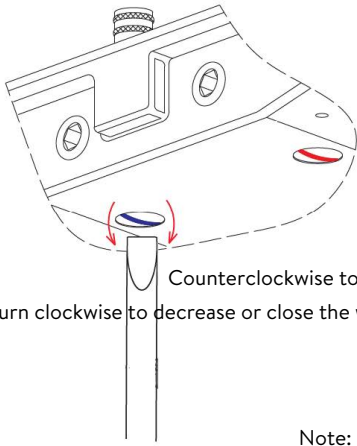


Counterclockwise to increase

Turn clockwise to decrease or close the water inlet


Use of pressure regulating check valve:

1. When the pressure of cold and hot water is unbalanced, such as the pressure of cold water, it can be, Adjust the check valve on the right, if the hot water pressure is high, it can be adjusted, The check valve on the left.
2. The pressure regulating check valve balances the water pressure, prevents back flow and, The function of shutting the water, when replacing the spool, use the left and right sides, Just close the water inlet by the pressure regulating check valve.

Note: When the screw is adjusted to balance with the main body. Wakame, If the wire is loosened, water leakage and other situations may occur.

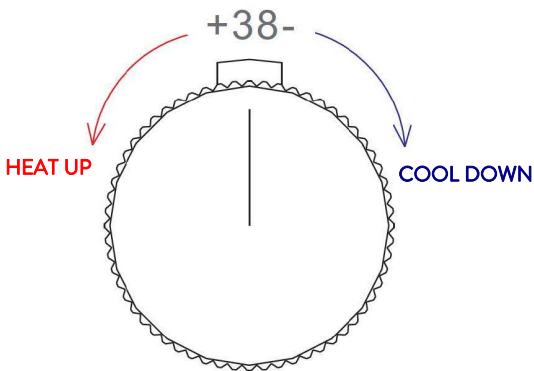

38°C is the normal temperature

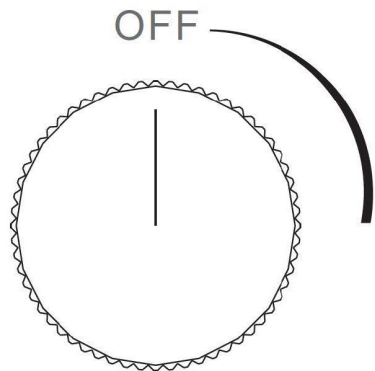

This installation drawing only provides customers as an installation guide, and the product configuration is configured according to the customer's order and requirements. All products, Our company reserves the right of final interpretation for the size of accessories.

[illegible]

# BAGNODESIGN

EXPERTLY CRAFTED BATHROOMS

---

---

---

---

---

---

---

---

---

---

---

---

---