


BAGNODESIGN

EXPERTLY CRAFTED BATHROOMS

Installation Guide

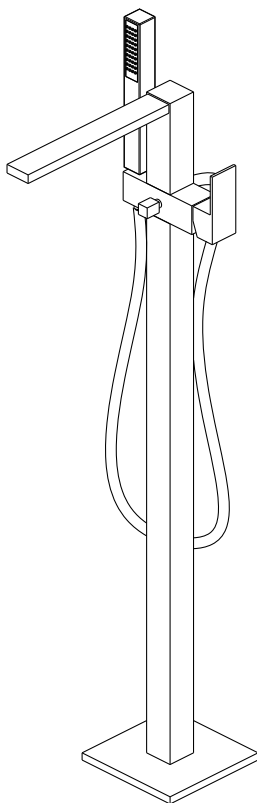

BDM-MEZ-451-CP

MEZZANINE F/MTD BATH MIXER W/O HAND SHOWER CP

A member of SANIPEXGROUP

Please leave these instructions with the customer

IMPORTANT PLEASE READ

All products manufactured and supplied by BAGNODESIGN are fit for purpose as long as they are Installed, used correctly, cleaned and receive regular maintenance in accordance with these instructions...

Remove all packaging and check the product for damage or missing parts before commencing with the installation.

Any alterations made to this product and its components may infringe product certification, infringe water regulations and invalidate the guarantee. The Installation must comply with all local/national water supply authority regulations/byelaws and building and plumbing regulations, therefore we strongly recommend that your product be installed by a reputable qualified trade's person.

PRODUCT LIFECYCLE

"The product lifecycle is the collective stages that a product goes through from its conception and design through to its ultimate disposal."

DISPOSAL GUIDANCE

The best way to ensure your Product has a long life is to follow the Care and Maintenance guides set by the Manufacture after purchase. This document can be found at www.aquazone-uk.com.

The lifecycle of the product is not in correlation to the product Guarantee; the standards the products are manufactured or certified to (e.g. CE & WRAS) can exceed past the Guarantee duration. After the lifecycle of the product is deemed complete by the end-user please follow the below to dispose of the items correctly...

Mixers (Taps):

If the mixers are no longer accepted due to mechanical use or aesthetic style, these can be disposed of at a registered Local Authority waste recycling centre where the individual components can be sorted.

CLEANING CARE GUIDE

Only use a mild soap and water for cleaning.

Rinse with water to remove the mild soap solution.

We recommend the product is dried using a soft cloth after every use.

Never use any abrasive or strong cleaning products containing, bleaches, acids (hydrochloric, formic, phosphorus, chlorine or acetic), strong detergents, limescale remover, alcohol or dyes etc.

Never use abrasive cleaning pads, wire wool or microfibre cloths.

Never use cleaning equipment that may have been pre-used and contaminated with the above substances.

Never apply the cleaning product directly onto the finished surface.



GENERAL INSTALLATION:

To the installer, please read and follow these instructions carefully, as the guarantee is only valid if the product is installed as directed.

Don't rush, read the instructions first and run through them before you begin, keep the fittings together to avoid loss, do not overtighten screws or bolts.

If the product is covered with polythene protective film, do not remove until the installation is complete to grant maximum protection. However, remove film where any two surfaces will be in permanent contact. If tools are required to be used on a 'finished' surface, please place a cloth or similar over the area to protect the item from unnecessary scratching.

Before making any inlet pipe connections, all supply pipes **MUST** be flushed to remove debris such as solder, swarf, plastics and other building/construction substances.


The fitting of an in-line filter is recommended, failure to do this could result in damage to the cartridge and its components, it could also result in poor performance water flow from the outlet.

The fitting of isolation/stop valves on the inlet feeds is advised for ease of maintenance.

On fittings such as faceplates a small amount of lubrication is recommended on the rubber seals for ease of fitting.

CONNECTIONS:


Flexible inlet pipes must be connected carefully to the plumbing system so that they do not **bend**, **twist** or **kink**. Failure to do so can result in poor performance from the mixer and possible failure of the hose leading to bursting and leakage.

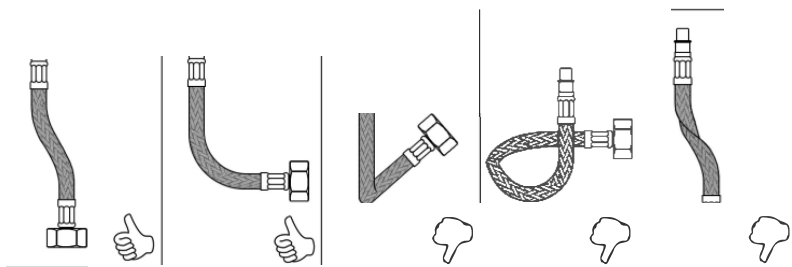

Pipework to concealed mixers must be installed in accordance to local regulations and is recommended to be insulated to prevent heat loss, prevent freezing and reduce condensation.

Hot and cold operating pressures should be kept as balanced as possible in order to maintain maximum efficiency.

This installation guide is for reference only, in case there is a discrepancy between that of the instructions and that of the actual product, the latter should be taken as standard & subject to change without prior notice.




01


INSERT THE TWO METAL PLUGS INTO THE BODY

02

DRILL FOUR Ø5mm HOLES INTO THE CONCRETE LAYER, THEN INSERT THE PLASTIC PLUGS AND FIX THE BODY USING THE PROVIDED SCREW.

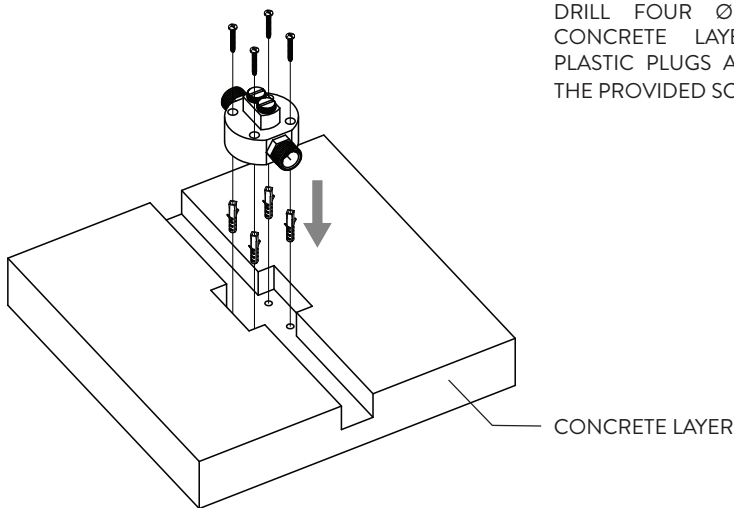


CONCRETE LAYER

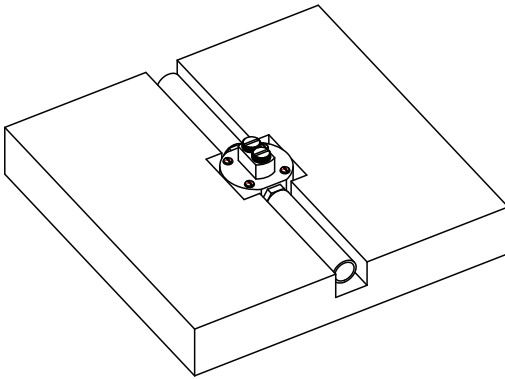

0

3 ONCE THE PIPES ARE CONNECTED TO THE BODY, PROCEED TO A PRESSURE TEST AND MAKE SURE THERE ARE NO LEAKS

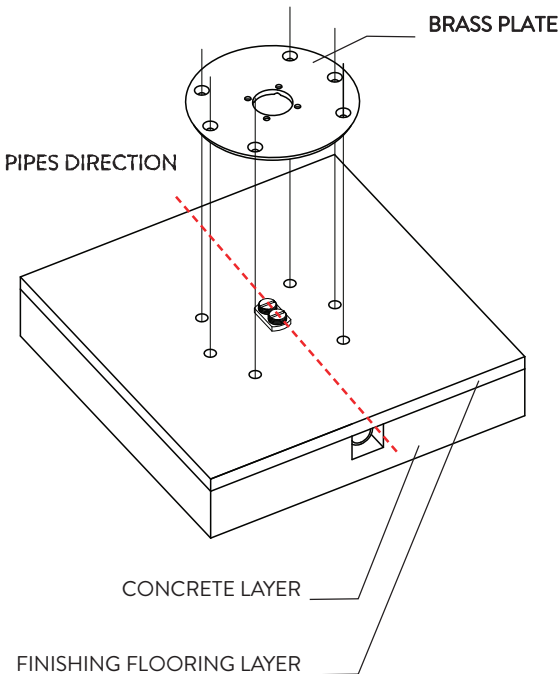


0

4 USING THE BRASS PLATE AS A TEMPLATE MARK THE SIX HOLES FOR THE Ø10mm PLASTIC PLUGS .




CAUTION

MAKE SURE THE BRASS PLATE IS PLACED IN THE RIGHT DIRECTION TO AVOID THE RISK OF DRILLING A HOLE INTO A PIPE RUNNING UNDER THE FLOOR.

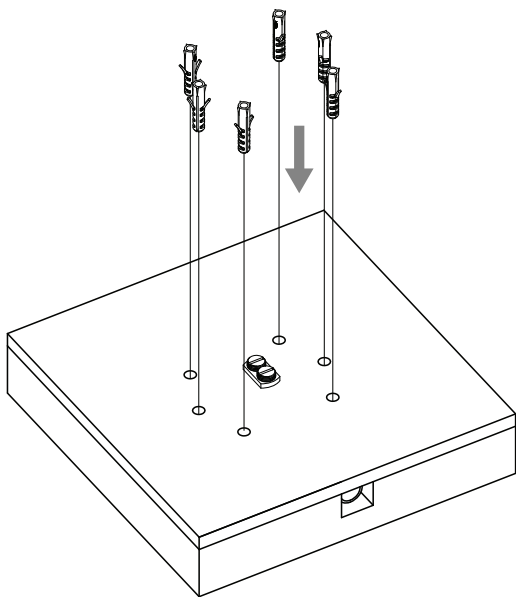

05

INSERT THE PROVIDED PLASTIC PLUGS INTO THE PREVIOUSLY DRILLED HOLES

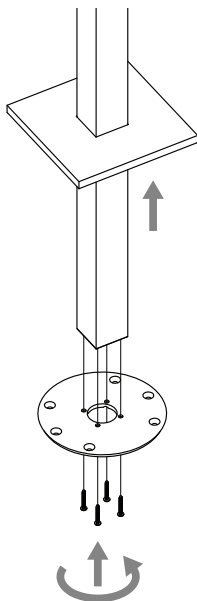

06


SLIDE THE SQUARE PLATE OVER THE COLUMN, PAYING ATTENTION NOT TO SCRATCH THE COLUMN ITSELF. THEN FIX THE BRASS PLATE TO THE COLUMN USING THE FOUR PROVIDED SCREWS.



CAUTION




TWO OPERATORS ARE REQUIRED TO AVOID DAMAGES.

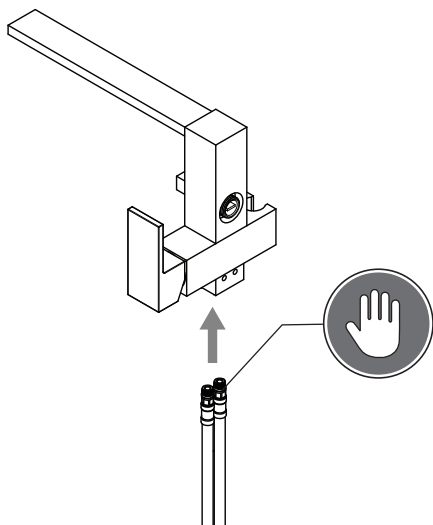


11

CONNECT THE FLEXIBLE HOSES TO THE MIXER BODY AND FIX THEM BY HAND.

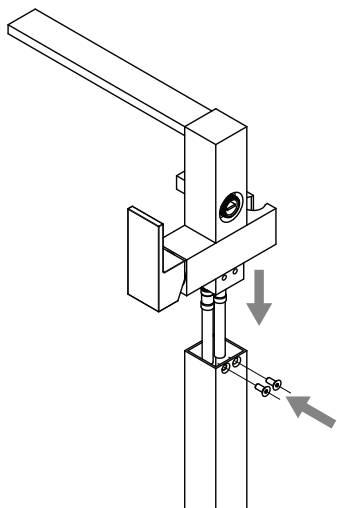


12

INSERT THE MIXER BODY WITH THE FLEXIBLE HOSES INTO THE COLUMN AND FIX IT USING THE TWO HEX SCREWS ON THE BACK.

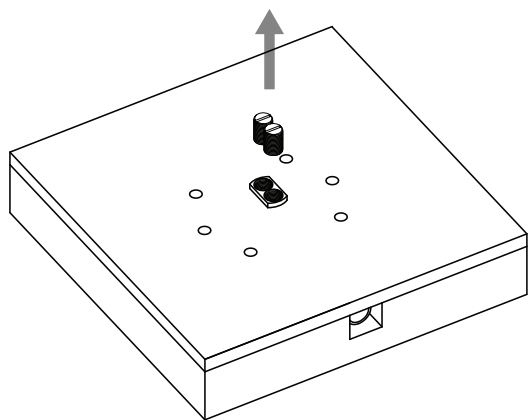


07

REMOVE THE TWO METAL PLUGS FROM THE RECESSED BODY.

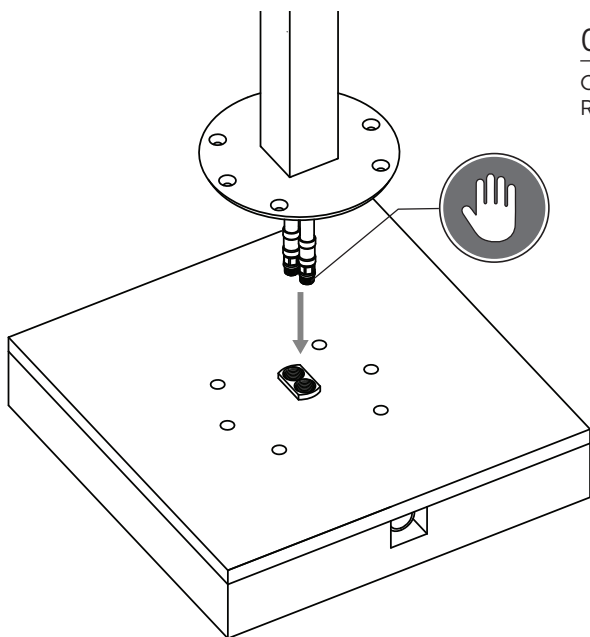


08

CONNECT THE TWO FLEXIBLE HOSES TO THE RECESSED BODY WATER OUTLETS.

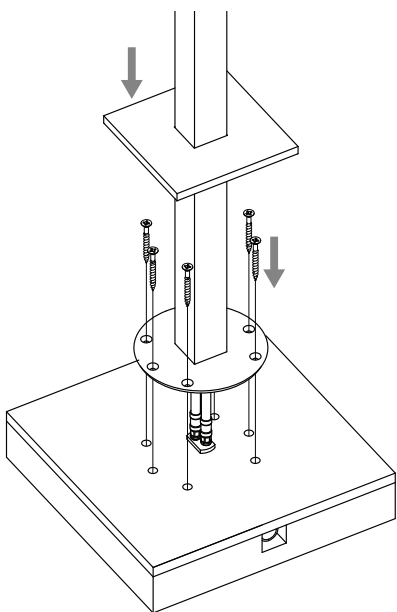

09

FIX THE BRASS PLATE TO THE FLOOR USING THE SIX PROVIDED SCREWS. GENTLY SLIDE DOWN IN PLACE THE SQUARE PLATE.

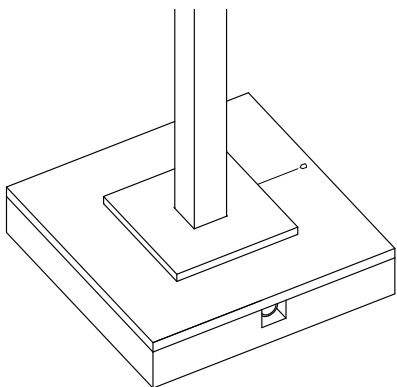


10

FIX THE SQUARE PLATE USING THE PROVIDED HEX SCREW.

13

CONNECT THE FLEXIBLE HOSE OF THE SHOWER TO THE DIVERTER OUTLET ON THE BACK SIDE OF THE MIXER BODY.

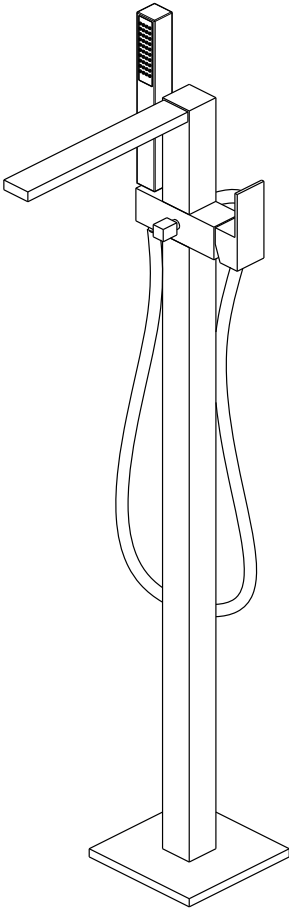

INSTALLATION COMPLETE!!!

[illegible]

BAGNODESIGN

EXPERTLY CRAFTED BATHROOMS

Oakwell Way, Birstall
Leeds, England WF9 17LU

A member of SANIPEXGROUP