



7

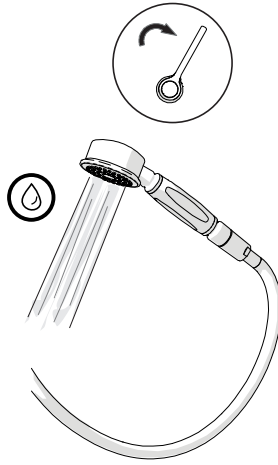

9

**NOBILIS®**  
The Best Technology for Water

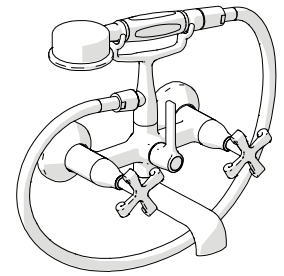


CP210



IISTRCP210R--STD

www.grupponobilis.it

REV.2.07/2017

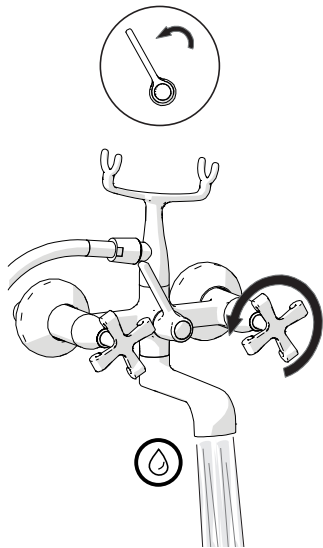

8

10  
Insert the 2 columns into the 2 Ø 30 mm top holes with 150 mm spacing  
Screw the external bath assembly with the gaskets using the CH 30 mm key

