


BAGNODESIGN

EXPERTLY CRAFTED BATHROOMS

Installation Guide

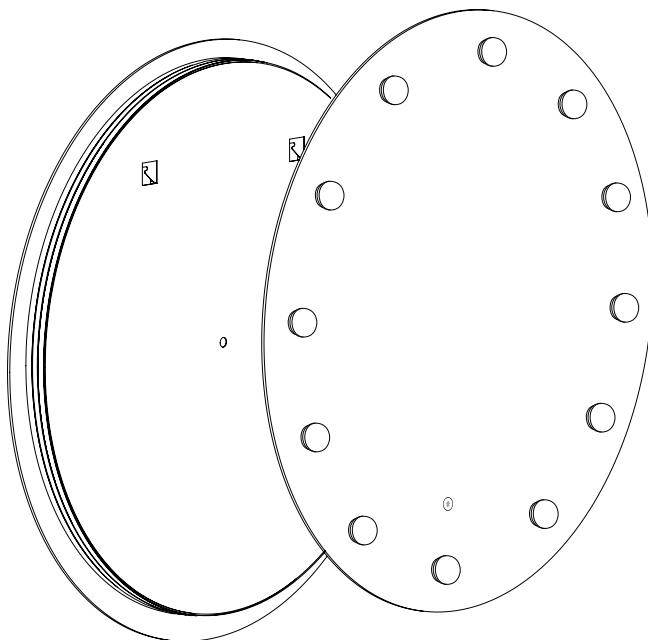

BDR-MNR-ROUND-MIRROR MONROE ILLUMINATED ROUND MIRROR WITH LED BULBS

A member of **SANIPEXGROUP**
www.sanipexgroup.com

IMPORTANT PLEASE READ

Remove all packaging and check the product for missing parts or damage before starting installation.

Any alterations made to this product and fittings may infringe water regulations and invalidate the guarantee.

The Installation must comply with all Local/National Water Supply Authority Regulations/Byelaws and Building and Plumbing Regulations.

We strongly recommend that your product be installed by a reputable qualified trade's person.

General Installation:

To the Installer, please read and follow this instruction carefully, as the guarantee is only valid if the product is installed as directed.

Don't rush, read the instructions first and run through them before you begin. Keep fittings together to avoid loss. Do not over tighten screws or bolts.

If the product is covered with polyethylene protective film, do not remove until installation is complete to grant maximum protection. However, remove film where any two surfaces will be in permanent contact.

Please leave this installation manual with the end user once the product has been installed.

Product Aftercare:


We recommend cleaning with a soft damp cloth and mild soap solution. Do not use cream cleaners or cleaners containing bleach.

Do not scrub or scour.


Do not use abrasive cleaning agents.

Do not use solvent based cleaners.


Mirror Dia700/1000mm

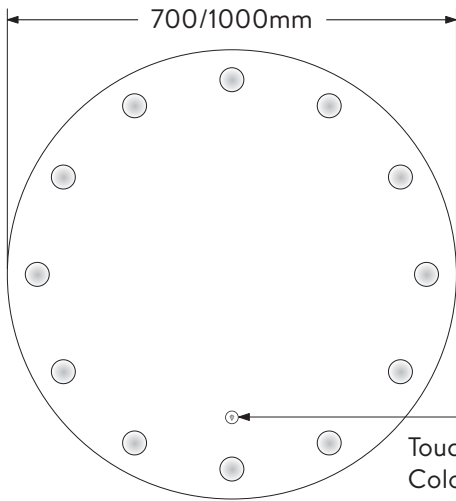


Front view

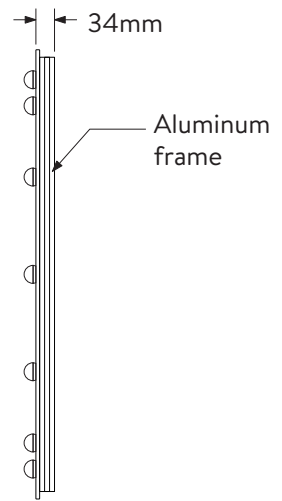

Side view

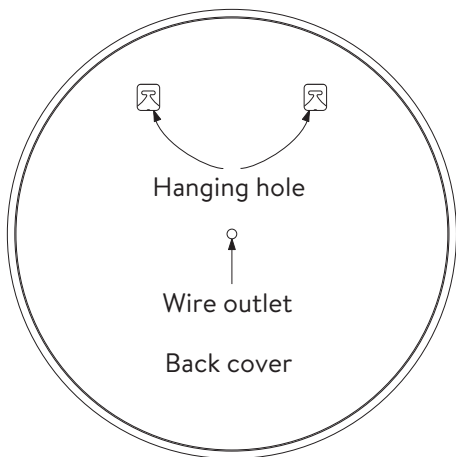

Back view

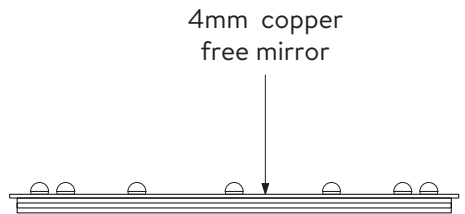

Bottom view

Technical Details

Heated De-mister Pad

This mirror comes with a demister pad, which heats the surface of the mirror above room temperature removing the mist on surface .

Switch On/Off, Color change and Brightness change

1st touch turn-on the light with white color, 2nd touch gives warm light, 3rd touch gives neutral light, the 4th touch turns-off the light, keep on pressing can change the brightness.

Electrical Safety Information

We recommend that all electrical bathroom products should only be fitted by a qualified -Part P registered electrician in accordance with the current IEE Regulations.

Please ensure the Mains supply is switched off before attempting installation. Before drilling ensure there are no hidden cables or pipes in the wall.

Installation Information


We recommend that you receive the product before commencing with installation as all sizes and measurements are approximate.

We try to ensure all measurements are as accurate as possible.


Installation Procedure

Notes: To ensure the normal use of products, it is required you set out wires as per the regulations at the installation places. The Products are only applicable to being installed on the indoor solid wall. The installation must be carried out by a professional electrician and wrong installation may lead to product damage and personal injury.


Installation Procedure




Flexible rule




Spirit level



Drill



Hammer



Pencil

1. Make certain the wall is solid, and use the flexible rule to measure the distance between two hardy holes on the mirror frame ("a" in Fig. 1).
2. Use the flexible rule to measure the distance a on the wall and mark them out with a pencil.
3. Choose a drill with an appropriate drill bit to make two holes at the marked places, and use a special ceramic drill if the wall surface is made of ceramic tiles.
4. Use the hammer to strike an expansion rubber plug into the holes on the wall, and then screw the hook into the hole (Fig. 2).
5. Switch off the power, and then use a terminal block to connect the three-core exposed wires with those reserved on the wall (see details in Fig. 4).
6. Hang the product on a wall hook (Fig. 3).
7. Finally switch on the power, and then touch the switch sign with a finger on the sensor to test the products.




Fig. 1




Fig. 2






Fig. 3

Wiring Diagram for Input

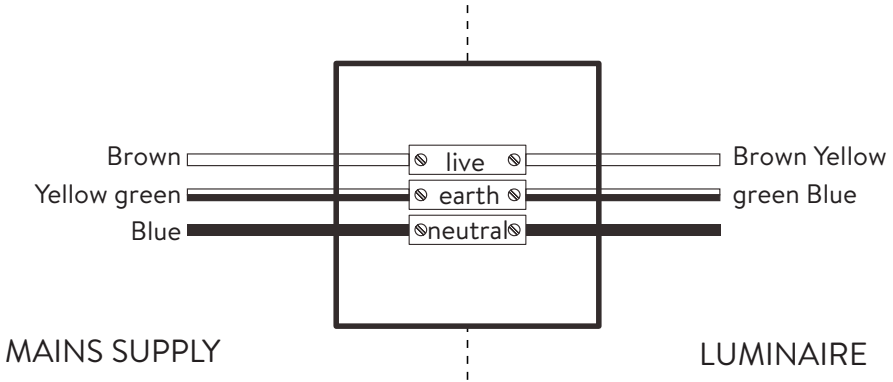


Schematic Diagram

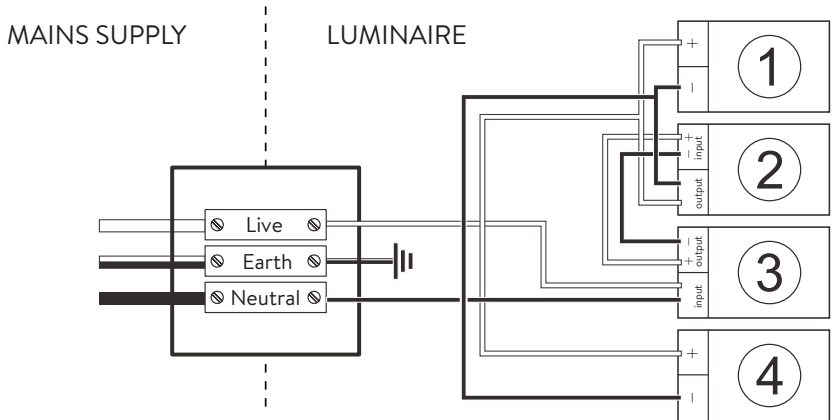

- ① LED strip
- ② Touch Sensors
- ③ Supply Power
- ④ Deffogger Pad

Fig. 4



Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this mark (left) must not be disposed off with other household or commercial waste. We do not levy any WEEE disposal charges to its customers for affected WEEE related products. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Center or retailer for recycling advice.

